

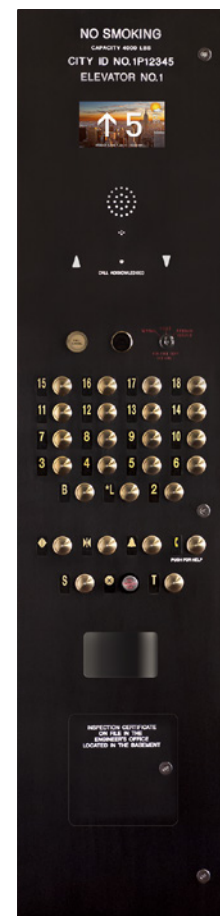


BP SERIES



The BP Series pushbuttons is vandal-proof, machine-turned stainless steel with an illuminated central target. Buttons may be paired with a large selection of Braille tags combine aesthetics and accessibility.

- Studless Mounting
- Vandal-proof
- Stainless Steel or PVD Brass, non-tarnishing finish
- LED Illumination available in Red, Green, Blue & White




4" Regular SS#4 Flush Mount shown with BP Classic Pushbutton, Code Blue Keyswitch & Vanishing Indicator

Oil Rubbed Finish COP shown with 7" Mosaic TFT PI, BP Classic Pushbutton, Plaza Slimline flush mount tactile, 2000 code with service cabinet


General Details

- General:** Vandal Proof Studless Frontal Mounting Stainless Steel Pushbutton. Fastened by jam-nut on plates from 11 to 22 Gauge thick.
- Pressel:** AISI 303 turned Stainless Steel (standard or PVD-coated finishes) Pressel activation is limited by by Stainless Steel base in Pressel. This prevents any stress on contact block resulting in an extremely robust vandal-proof pushbutton.
- Contacts:** Available with one or two microswitch(es)
- Wiring:** Screw terminals or JST Pin Connector
- Illumination:** LED-illumination of target in Red, Green, Blue, White and Amber
- Stroke:** 0.040"
- Avg. Life:** 1,500,000 activations
- Degree of protection:** IP54

Physical Characteristics

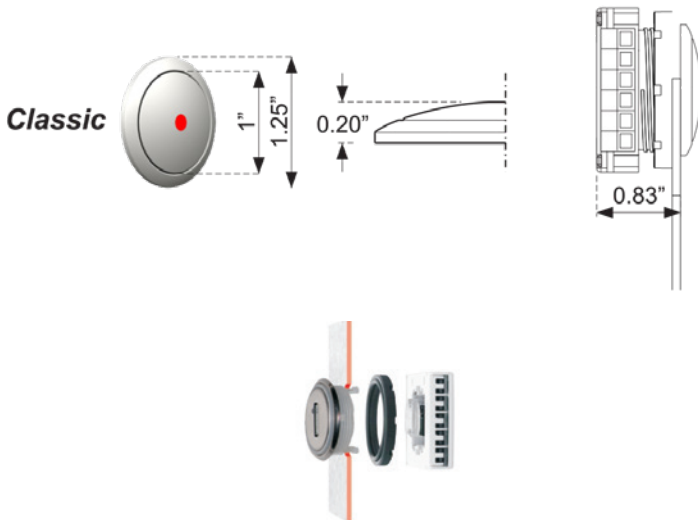

Mounting Requirements

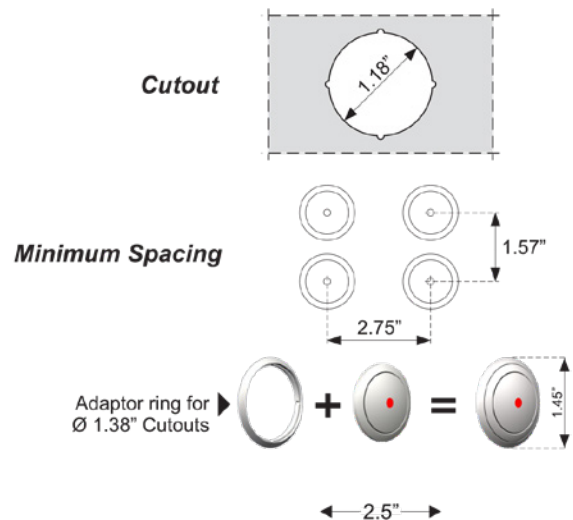

Component Ordering Information

Complete Assembly		Pressel & Bezel Only		Contact Only	
BL X V F X X X X .XX		BL X V F 3 0 0 0 .XX		BS 0 0 0 X X X X .00	
Style S- Round Q- Square	Marking 00- Blank 02- '2' AL- ⚠ etc...	Style S- Round Q- Square	Finish V- Pearl SS	Contact 0 - No Contact 3 - 1 Contact (Microswitch) 4 - 2 Contact (Microswitch)	Illumination 0 - No Illumination A - Amber B - Blue R - Red G - Green W - White
Finish V- Pearl SS	Illumination 0 - No Illumination A - Amber B - Blue R - Red G - Green W - White	Marking 00- Blank 02- '2' AL- ⚠ etc...	Marking 00- Blank 02- '2' AL- ⚠ etc...	Voltage 4 - 24V AC/DC M - Multivolt 6V-120V AC/DC 0 - No Illumination	Wiring M - Screw Terminals C - JST Connector
Contact 0- No contact 3- 1 Contact (Microswitch) 4- 2 Contact (Microswitch)	Wiring M - Screw Terminals C - JST Connector				

Please do not hesitate to contact us for any questions or concerns. Our technical support staff is ready to assist you with any issues you may have.

