COLOSSUS

The Colossus oversized pushbutton is ideal for use in environments where accesibility is the prime objective. Available in single LED illumination.

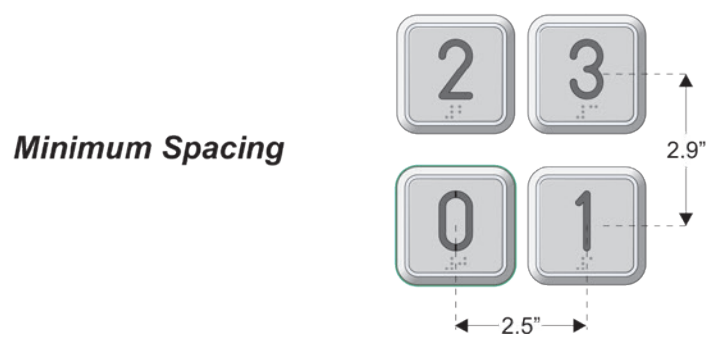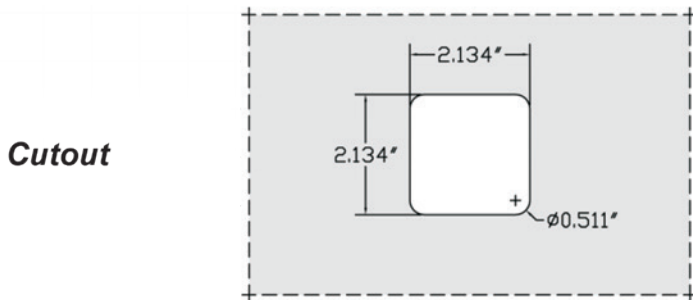- ◉ Studless Mounting
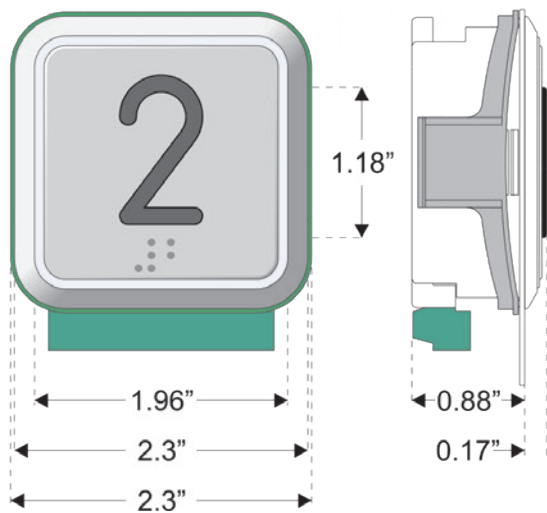- ◉ Shot-peen anti fingerprint Stainless Steel
- ◉ Rocker Activation

SS#4 COP shown with Mosaic TFT PI, Colossus pushbutton, Slimline tactile, 2000 code service cabinet

General Details

General:	Polycarbonate pushbutton with raised symbol and braille; stainless steel bezels; frontal mounting and fastening by clip ring on 0.03" to 0.3" faceplates
Pressel:	Polycarbonate with shot-peen stainless steel finishes; tactile (raised) illuminated symbol(s)
Contacts:	Microswitch, one or two contacts
Wiring:	Screw terminals
Illumination Light:	Raised symbol and halo illuminated upon activation
Cut-out:	2.1"x2.1" radius 0.3"
Stroke:	0.040"
Avg. Life:	1,500,000 activations
Degree of protection: 1P51	

Mounting Requirements

Cutout

Minimum Spacing

Physical Characteristics

Component Ordering Information

Complete Assembley

B7 X V X X M X .MQ

L- light
D- dual light

O- not illuminated
R- red
B- blue

Contact
1 - 1 Contact
2 - 2 Contact
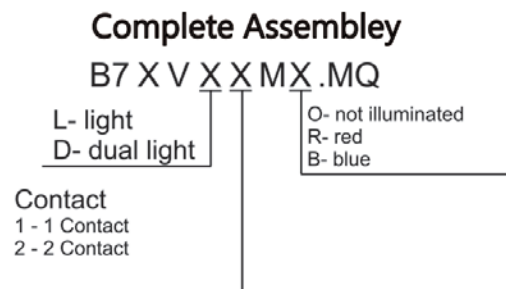
Please do not hesitate to contact us for any questions or concerns. Our technical support staff is ready to assist you with any issues you may have.