




The Dune Series pushbutton is vandal-proof, cast alloy with illuminated halo. Can be paired with a standard or illuminated square braille tag.

- ⦿ Studless Mounting
- ⦿ Satin Nickel or Brass colored non-tarnishing finish
- ⦿ LED Illumination available in Red, Green, Blue & White
- ⦿ Cast or White LED illumination braille halo
- ⦿ California compliant button available



White LED - Illuminated
SS Braille Tag - 2.9x1.6"



SS Braille Tag (Non-illuminated) - 2.9x1.6"



Cast Braille Tag 2.9x1.6"




No Braille Tag 1.6x1.6"



General Details

- General:** Vandal-proof Studless Frontal Mounting Cast Alloy Pushbutton. Fastened by jam-nut on plates from 11 to 22 Guage thick.
- Pressel:** Cast Zama Alloy with Satin Nickel or Brass colored finishes. Pressel activation is limited by the cast alloy base preventing any stress on the contact block resulting in an extremely robust vandal-proof pushbutton.
- Contacts:** Available with one or two microswitch(es) (2NO/1NC)
- Wiring:** Screw terminals or JST Pin Connector
- Illumination:** LED Illumination of halo in Red, Green, Blue and White
- Stroke:** 0.060"
- Avg. Life:** 1,500,000 activations
- Degree of protection:** 1PX3

Physical Characteristics

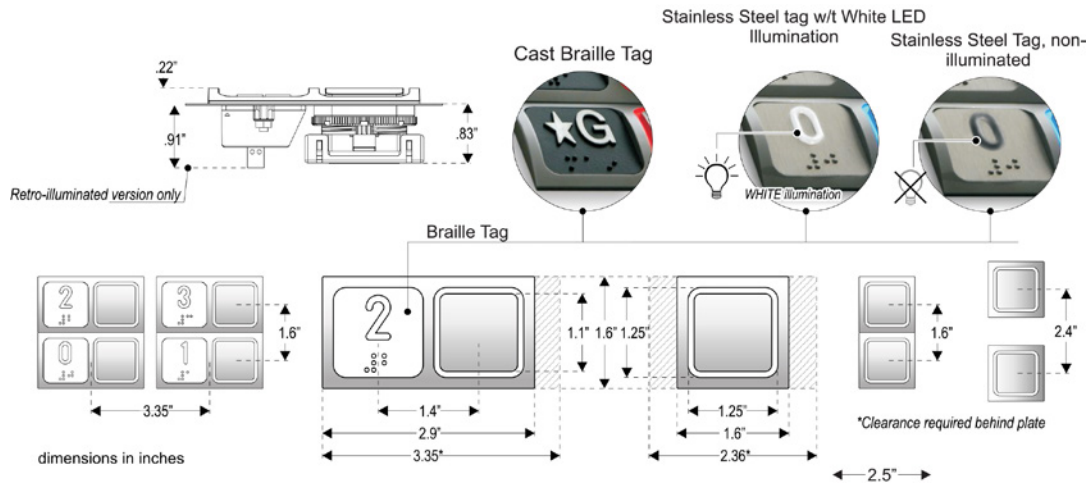

Component Ordering Information

<p>Complete Assembly BNX X FX X X X .XX</p> <p>Style Q - No Braille Tag T - Cast Braille Tag N - SS Braille Tag (not illuminated) B - White LED Illum. SS Braille Tag</p> <p>Finish V - Satin Nickel Y - Satin Brass</p> <p>Contact 3 - 1 Contact (Microswitch) 4 - 2 Contact (Microswitch)</p> <p>Voltage 4 - 24V AC/DC 0 - No Illumination</p>	<p>Pressel & Bezel Only BNX X F 0 0 0 0 .XX</p> <p>Finish V - Stainless Steel Y - PVD Brass</p> <p>Style Q - No Braille Tag T - Cast Braille Tag N - SS Braille Tag (not illuminated) B - White LED Illum. SS Braille Tag</p>	<p>Contact Only BS000 X X X X .01</p> <p>Contact 3 - 1 Contact (Microswitch) 4 - 2 Contact (Microswitch)</p> <p>Voltage 4 - 24V AC/DC 0 - No Illumination</p>	<p>Marking 00 - none 02 - '2' AL - α etc...</p> <p>Illumination 0 - No Illumination A - Amber B - Blue R - Red G - Green W - White</p> <p>Wiring M - Screw Terminals C - JST Connector</p> <p>Illumination 0 - No Illumination A - Amber B - Blue R - Red G - Green W - White</p> <p>Wiring M - Screw Terminals C - JST Connector</p>
---	--	--	--

Please do not hesitate to contact us for any questions or concerns. Our technical support staff is ready to assist you with any issues you may have.

